



## SIZE3


## Inch/(mm)




## Inch/(mm)




## Inch/(mm)

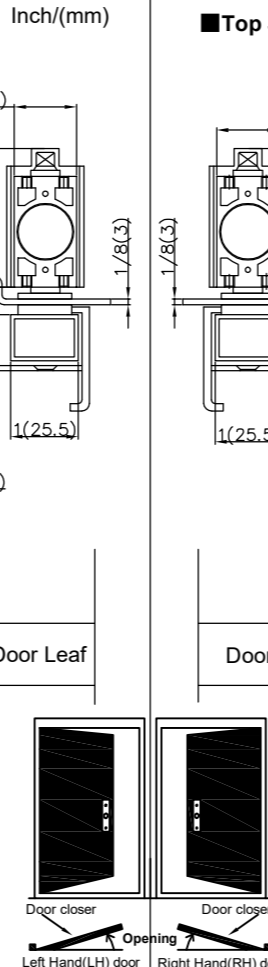

## Inch/(mm)

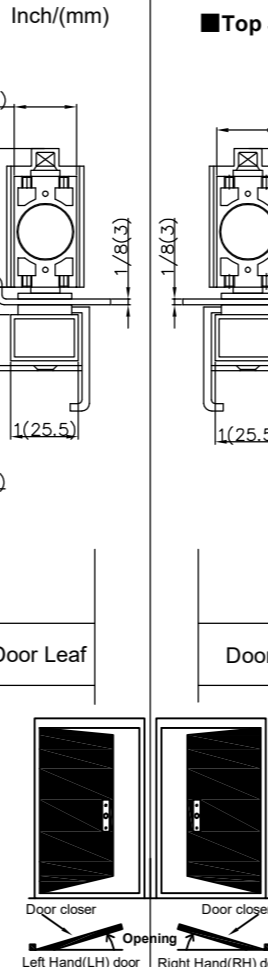


## ■ Description of Spare Parts

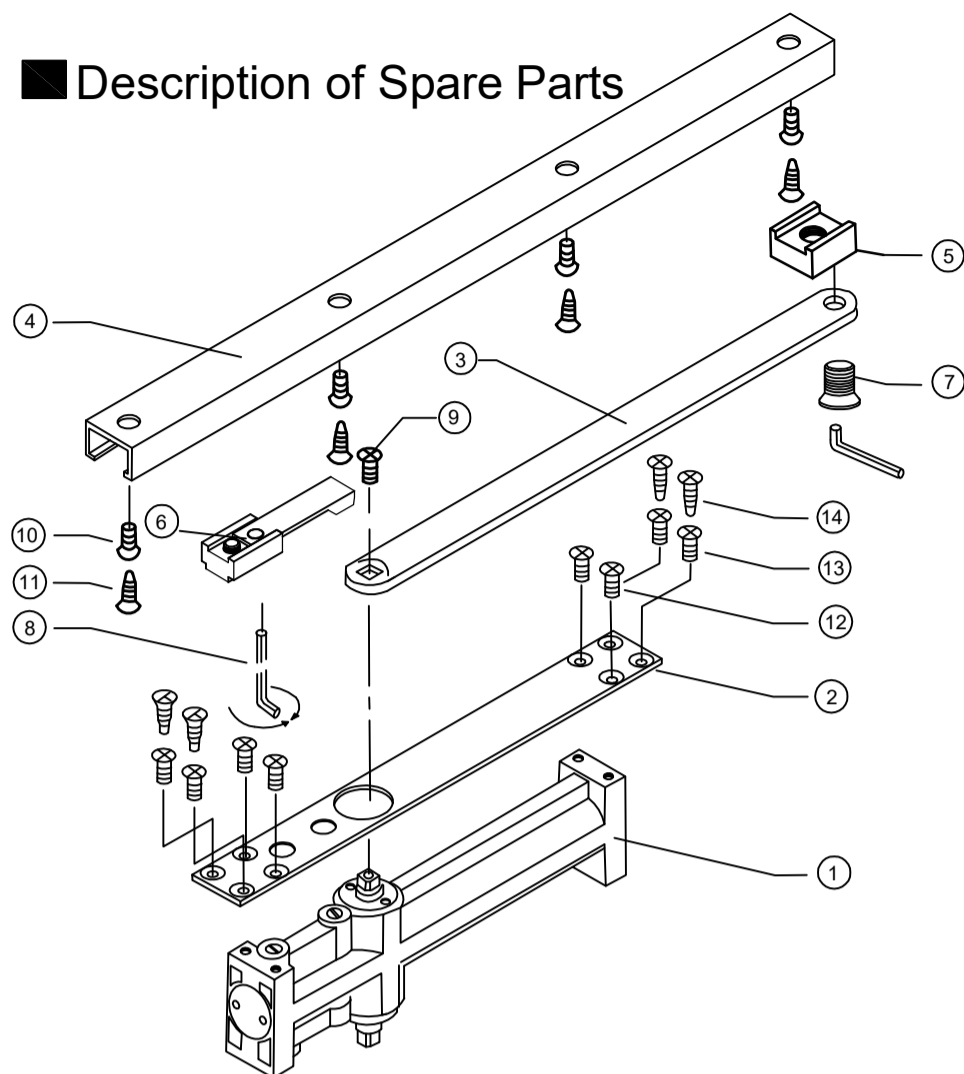


NO	Description	Q'TY
①	Body	1
②	Fixing Plate	1
③	Main Arm	1
④	Slide Track	1
⑤	Slider	1
⑥	Hold Open Nut	1
⑦	⊙Fixing Bolt M8X1	1
⑧	⊙Hex Spanner 5mm	1
⑨	⊕Screw M6x12L	1
⑩	⊕Screw M5x15L	4
⑪	⊕Self-drilling Screw ST4.8X25	4
⑫	⊕Screw M5x12L	4
⑬	⊕Screw M5x15L	4
⑭	⊕Self-drilling Screw ST4.8X25	4

NOTED: Please don't install the Hold open nut if closer with UL label.

## ■ Speed Adjustment

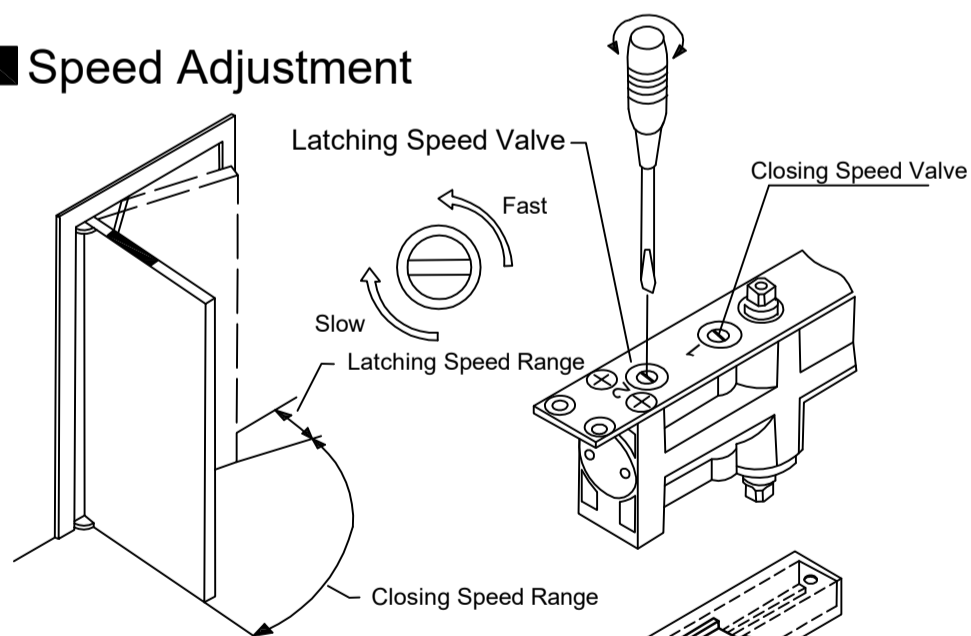


## ■ Hold Open Angle Adjustment

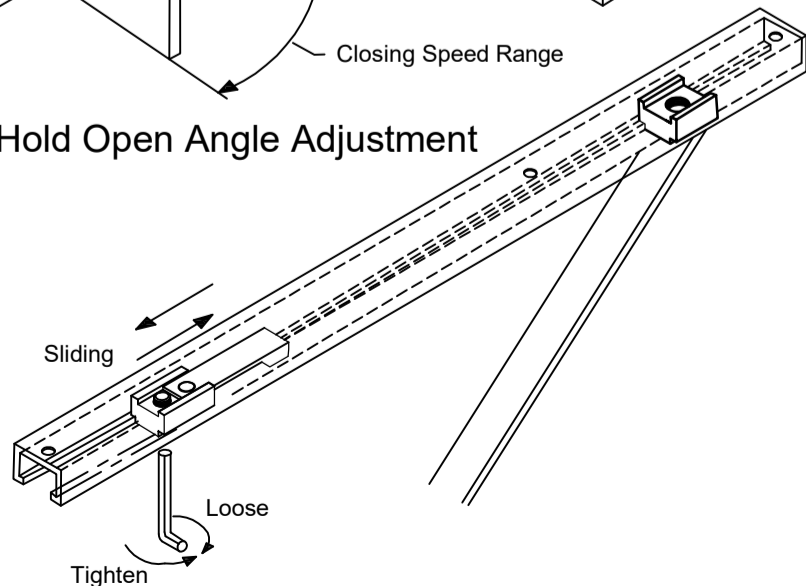

## ■ Non-Handed

## ■ Installation Steps


### ① Fixing and Installation of the Body

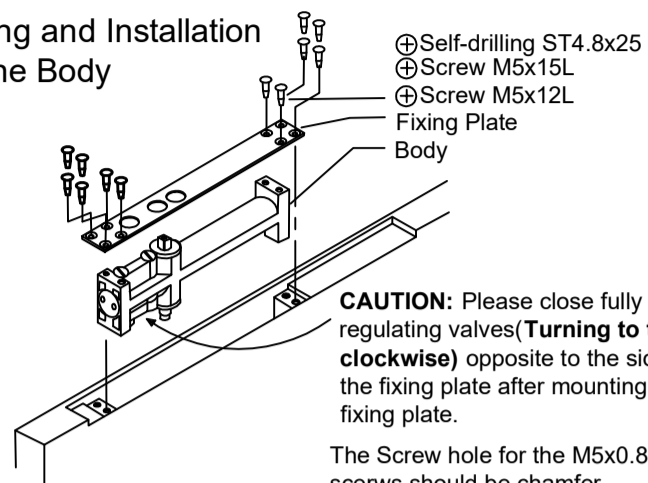


**CAUTION:** Please close fully the regulating valves (**Turning to the end clockwise**) opposite to the side of the fixing plate after mounting of the fixing plate.

The Screw hole for the M5x0.8 screws should be chamfer


### ② Fixing and Installation of the Slide Track

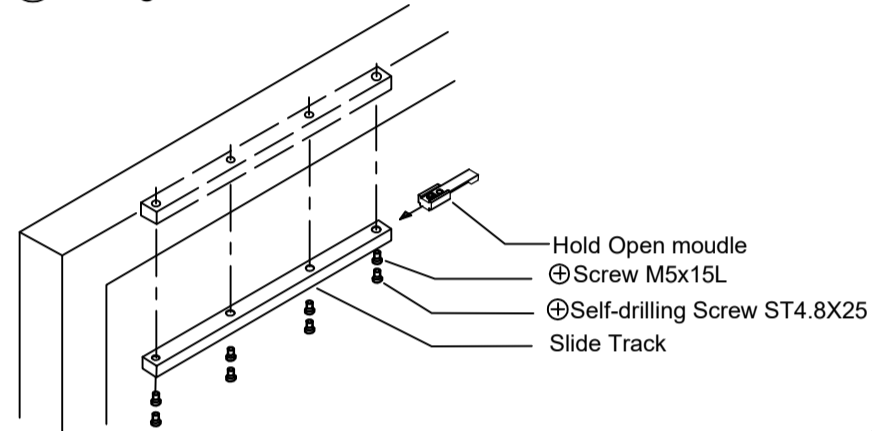

### ③ Combining the Main Arm and Body

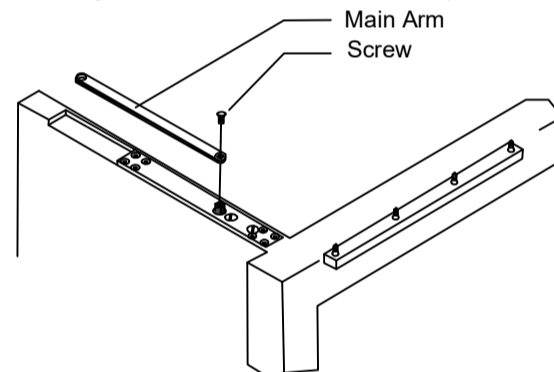

### ④ Combining the Main Arm and the Slider in the track

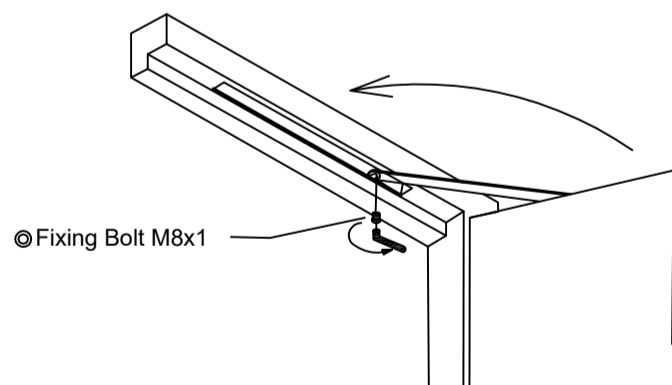

### ⑤ Opening Angle and Closing Speed Adjustment

